

**National Exams December 2011**

**04-Agric-B2, Structural Design for Agricultural, Biosystems, and Food Industries**

**3 hours duration**

**NOTES:**

1. If doubt exists as to the interpretation of any question, the candidate is urged to submit with the answer paper, a clear statement of any assumptions made.
2. This is an OPEN BOOK EXAM.  
Any non-communicating calculator is permitted.
3. FIVE (5) questions constitute a complete exam paper.  
The first five questions as they appear in the answer book will be marked.
4. Each question is of equal value.
5. Some questions require an answer in essay format. Clarity and organization of the answer are important.

1. Define the following terms and explain how they relate to the structural design of agricultural structures; use examples to illustrate your answers.

- a. live load (LL)
- b. dead load (DL)
- c. limit states design (LSD)
- d. load factor
- e. strength factor
- f. low human occupancy
- g. matrix structural analysis
- h. hoop stress

2. A reinforced concrete floor covers and is supported by a below-ground rectangular concrete liquid manure tank with a centre wall. Thus, the floor has two equal spans continuous over the centre support; each span is 5.0 m clear span. All wall thicknesses are 0.25 m. Select the appropriate concrete (strength, max. water/cement ratio) for this corrosive environment, and adequate reinforcing steel and slab thickness for the floor to support cattle in loose housing (LL. 5.0 kPa) and light farm machinery for cleaning and maintenance (LL. 7.0 kPa) Table 1 provides areas of reinforcement,  $A_s$ , per one-metre strip.

3. Analyze the beam in Figure 1 for reactions at A and B, shear forces and bending moments. Identify the maximum positive and negative bending moments and their location. Draw shear force and bending moment diagrams. Assuming that the beam cross section is rectangular in shape, what is the neutral axis and where is it located? If the beam width is  $b$  and the depth  $d$ , what is the maximum shear stress and where would this stress occur?


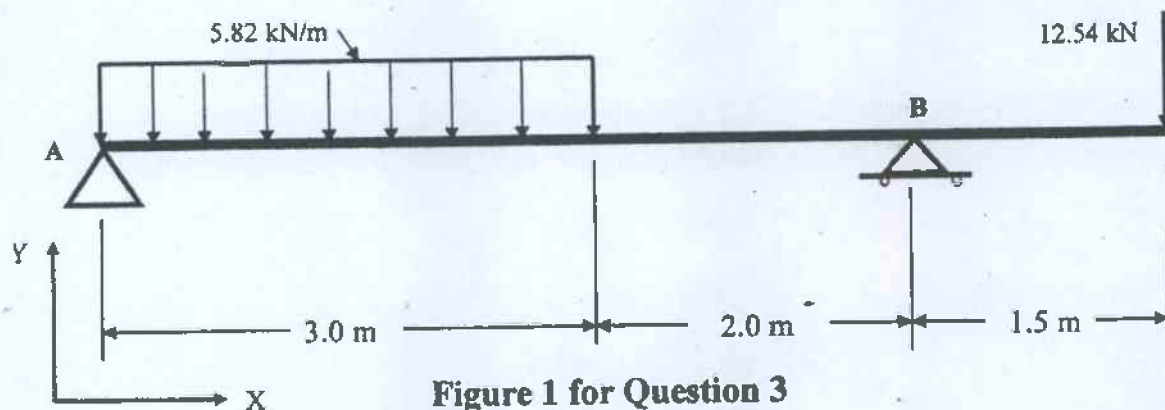


Figure 1 for Question 3

4. A horizontal or bunker silo for the storage of animal feed is simply a paved area surrounded on three sides by near-vertical retaining walls to contain the animal feed. The feed, mostly whole-plant corn silage or alfalfa forage, is deposited in the silo by dump trucks and consolidated by a tractor or a tracked vehicle, and then covered with plastic to keep the rain and snow out. The 1995 (latest) National Farm Building Code specifies a silage pressure perpendicular to the wall  $L = 3.5 + 3.5H$  kPa where  $L$  is the lateral pressure and  $H$  is the depth from top of wall, in m.

Design a precast concrete wall that can be used for a silo wall 4.0 m high measured from the top of the footing. Do not design the reinforcing steel. It is intended that the precast unit includes the wall and an appropriate footing. Design the geometry of a stable, adequate retaining wall and recommend the length of individual sections bearing in mind that they have to be transported by road. The wall will not typically be backfilled with soil except to provide frost protection for the footing.

5. The truss in Figure 2 will be constructed of structural steel. It is simply supported at joints 1 and 3. The applied force at joint 5 is sloped 3 horizontal to 4 vertical, as shown. Determine the forces in all seven members of the truss and indicate tension or compression. Make a sketch of what the connection at joint 2 might look like. Discuss your choice of connection. All truss joints may be assumed pinned.

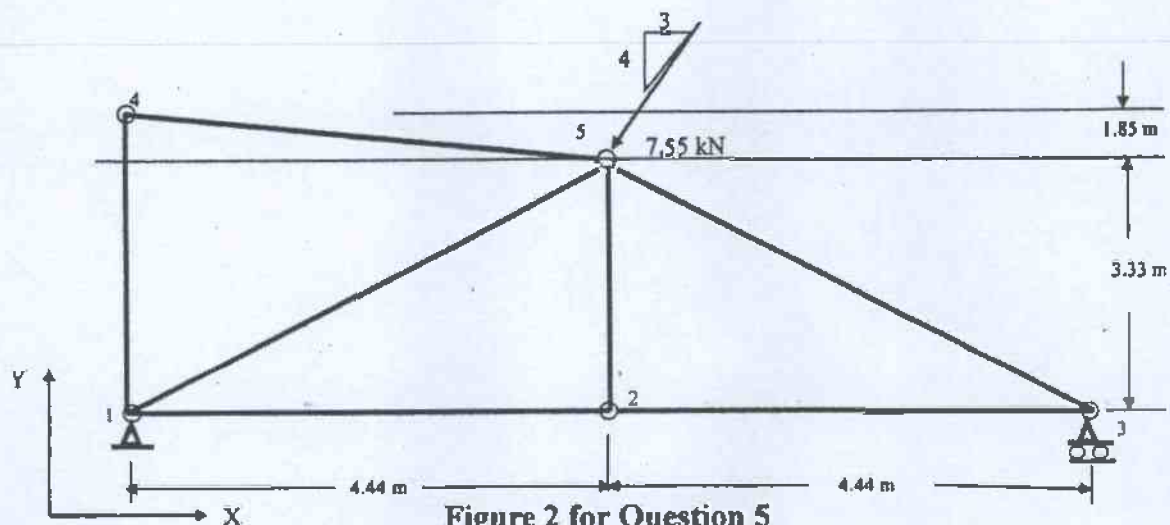

- 6a. Explain your understanding of prestressed concrete construction, including advantages and disadvantages. Draw a typical stress diagram across the depth at the centre of a simply supported prestressed concrete beam loaded with a uniformly distributed load, a) fully loaded, b) loaded with dead load only. What is meant by post-tensioned; and by pre-tensioned. Provide some typical examples of post-tensioned and pre-tensioned concrete applications.
- 6b. Many farm and food industry structures are in corrosive environments because of high moisture levels, manure in animal housings and acidity of silages. Discuss the measures that should be taken to reduce corrosion to a minimum of concrete components of buildings. Do the same for metal components of buildings. In your discussion pay close attention to and comment on the cost of any measures that you recommend.

**Table for Question 2**  
**Area of Reinforcing Steel,  $A_s$  in  $\text{mm}^2$ ,**  
**Per One-Metre Strip**

Bar Spacing mm	Bar Size (No.)				
	10	15	20	25	30
50	2000	1333	800	500	400
80	1250	889	500	312	250
100	1000	700	400	250	200
120	833	583	333	208	167
150	667	467	267	167	133
180	556	389	222	139	111
200	500	350	200	125	100
220	455	318	182	114	91
240	417	283	167	104	83
250	400	267	160	100	80
280	357	238	143	90	71
300	333	217	133	83	67
320	313	205	125	78	63
340	294	194	118	74	60
360	278	185	111	70	56
380	263	176	105	67	53
400	250	167	100	64	50
420	238	159	95	61	48
440	227	152	91	58	46
460	217	145	87	56	44